


RZN 4402-K V2 SHEV control panel



G 501002

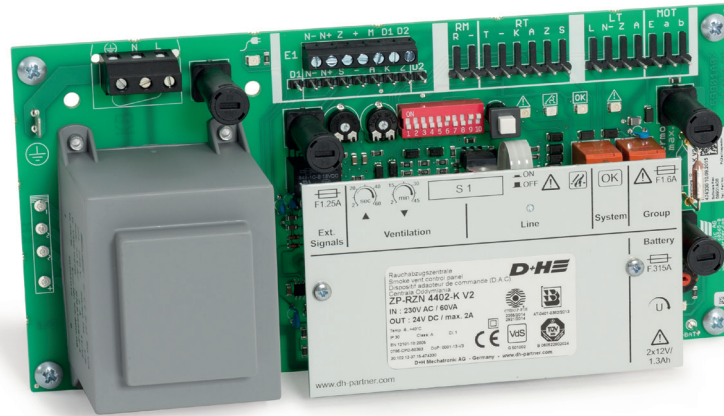

0786-CPD-50383



B 06 05 22802 024

Find out about permission details from your D+H Partner

Performance features

- » Compact SHEV control panel, specifically for stairwells
- » Up to 2 A total drive current
- » Stabilised output voltage
- » Switchable SHEV safety functions: Fault equal to alarm, SHEV retriggering function and smoke detector remote reset
- » Integrated comfort functions for daily ventilation
- » 1 slot for an additional module
- » Optional connection to rain detectors or wind / rain sensors without an additional module
- » Connection of up to 8 SHEV buttons and 14 fire detectors per line (Only detectors permitted by D+H may be used)
- » Min. 72 hr battery backup supply

Accessories

Battery



Plastic housing



Sheet steel housing




RT operation elements



Sensor systems



Example of application

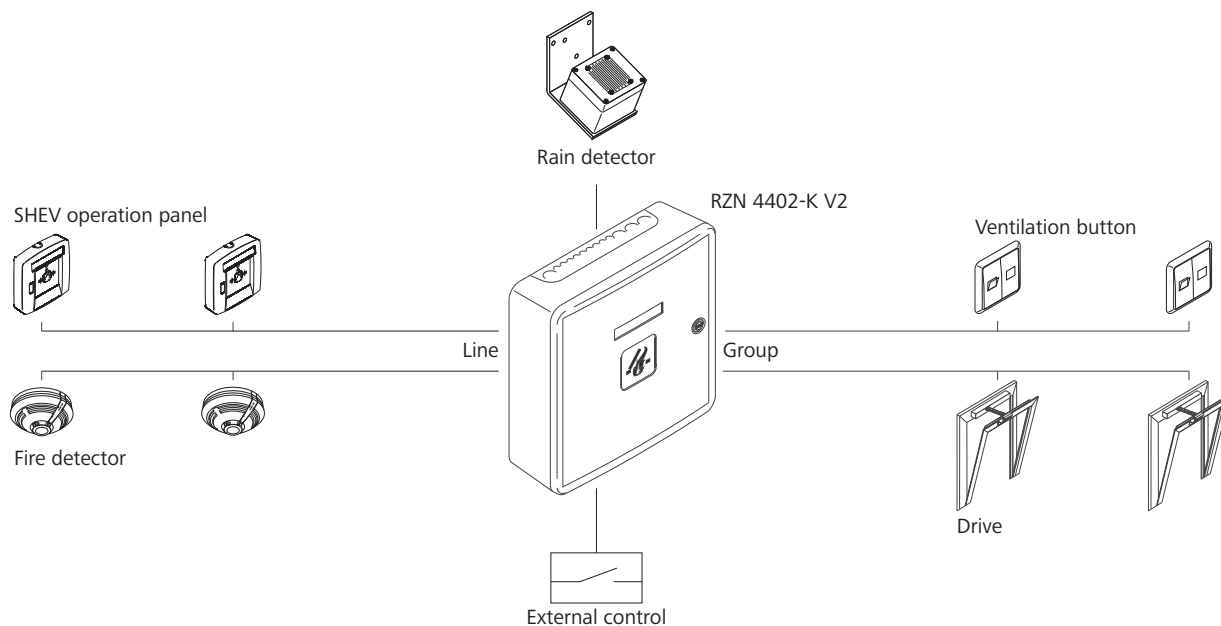


Technical data

Supply	230 V AC / 50 Hz / 60 VA
Stand-by power	5.6 W
Output	24 V DC / 2 A
Mode of operation monitoring	Continuous duty
Mode of operation Alarm / Ventilation	Short-time duty 30 % duty cycle
Temperature range	-5 °C ... +40 °C
Line / Group	1 / 1
Battery type	Typ 1 (2x)

Design

Type	Art. No.	Type of protection	W x H x D	Weight	Remark
ZP-RZN 4402-K V2	30.102.13			1.80 kg	With alarm devices = battery type 2 (2x)
RZN 44xx-K/M	30.104.70				Variable equipment possible
GEH-S-RWA	30.105.30	IP 54	400 x 300 x 120 mm	7.25 kg	Sheet steel housing
GEH-KST	63.600.81	IP 30	310 x 310 x 100 mm	1.40 kg	Plastic housing
Akku Typ 1	70.200.04		97 x 53 x 43 mm	0.55 kg	Battery capacity 1,2 Ah ± 15 %
Akku Typ 2	70.200.01		178 x 66 x 34 mm	1.06 kg	Battery capacity 2,2 Ah ± 15 %

RZN 4404-K V2 SHEV control panel

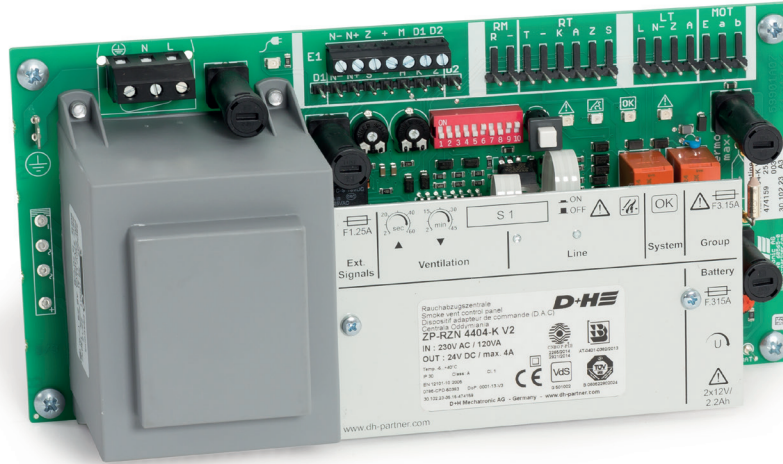

G 501002



0786-CPD-50383



B 06 05 22802 024

Find out about permission details from your D+H Partner


Performance features

- » Compact SHEV control panel, specifically for stairwells
- » Up to 4 A total drive current
- » Stabilised output voltage
- » Switchable SHEV safety functions: Fault equal to alarm, SHEV retriggering function and smoke detector remote reset
- » Integrated comfort functions for daily ventilation
- » 1 slot for an additional module
- » Optional connection to rain detectors or wind / rain sensors without an additional module
- » Connection of up to 8 SHEV buttons and 14 fire detectors per line (Only detectors permitted by D+H may be used)
- » Min. 72 hr battery backup supply

Accessories

Battery	Plastic housing	Sheet steel housing	RT operation elements	Sensor systems

Example of application

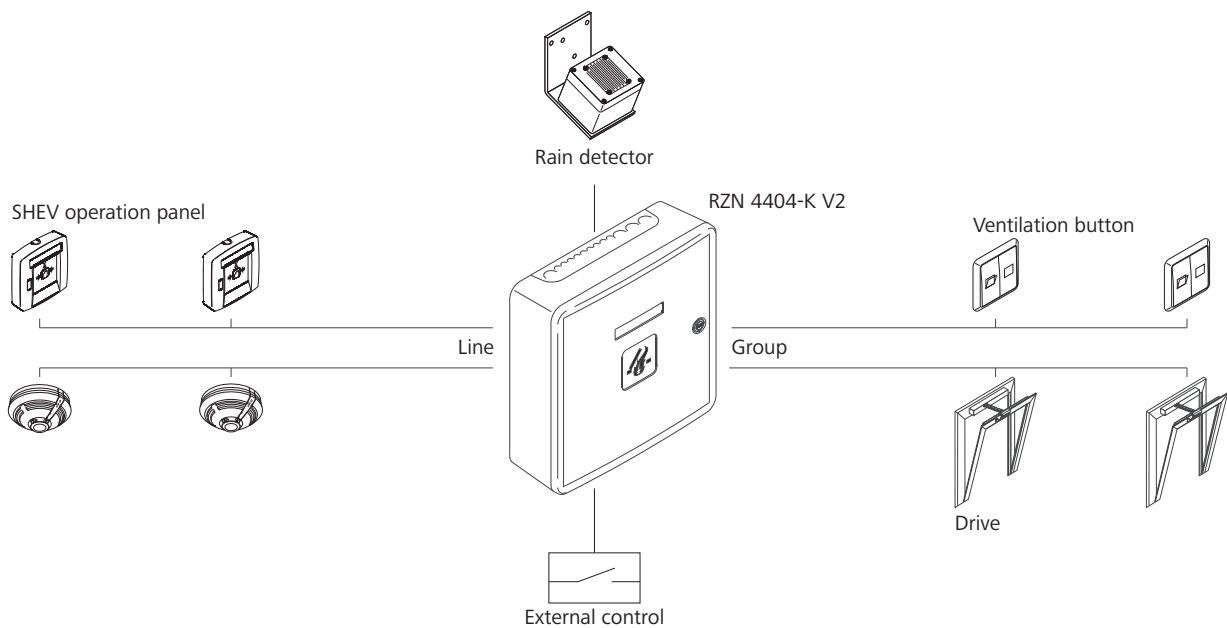

Technical data

Supply	230 V AC / 50 Hz / 120 VA
Stand-by power	5.8 W
Output	24 V DC / 4 A
Mode of operation monitoring	Continuous duty
Mode of operation Alarm / Ventilation	Short-time duty 30 % duty cycle
Temperature range	-5 °C ... +40 °C
Line / Group	1 / 1
Battery type	Typ 2 (2x)

Design

Type	Art. No.	Type of protection	W x H x D	Weight	Remark
ZP-RZN 4404-K V2	30.102.23			2.00 kg	With alarm devices = battery type 8 (2x)
RZN 44xx-K/M	30.104.70				Variable equipment possible
GEH-S-RWA	30.105.30	IP 54	400 x 300 x 120 mm	7.25 kg	Sheet steel housing
GEH-KST	63.600.81	IP 30	310 x 310 x 100 mm	1.40 kg	Plastic housing
Akku Typ 2	70.200.01		178 x 66 x 34 mm	1.06 kg	Battery capacity 2,2 Ah ± 15 %
Akku Typ 8	70.200.12		134 x 66 x 67 mm	1.40 kg	Battery capacity 3,4 Ah ± 15 %