

Manual SHEVS Detectors (Breakglass Units)



Breakglass unit (main control device) with fault indicator

Surface mounted plastic housing (ABS)

- Buttons: **EMERGENCY-OPEN** and **CLOSE**
- Displays: **EMERGENCY-OPEN, operation** and **fault**

Housing dimensions:

(W x H x D)	Colour	
130 x 130 x 32 mm	red	(like RAL 3000) 528691
130 x 130 x 32 mm	yellow	(like RAL 1018) 528692
130 x 130 x 32 mm	grey	(like RAL 7035) 528693
130 x 130 x 32 mm	blue	(like RAL 5009) 528694
130 x 130 x 32 mm	orange	(like RAL 2011) 528695

Ord.no.: **528695** (orange) with **VdS** registration no. G 501006



Breakglass unit (secondary control device)

Surface mounted plastic housing (ABS)

- Button: **EMERGENCY-OPEN**
- Display: **EMERGENCY-OPEN**

Housing dimensions:

(W x H x D)	Colour	
130 x 130 x 32 mm	red	(like RAL 3000) 525001
130 x 130 x 32 mm	yellow	(like RAL 1018) 525002
130 x 130 x 32 mm	grey	(like RAL 7035) 525003
130 x 130 x 32 mm	blue	(like RAL 5009) 525004
130 x 130 x 32 mm	orange	(like RAL 2011) 525005

Ord.no.: **525005** (orange) with **VdS** registration no. G 501006



Breakglass unit with fault indicator in aluminium housing

Surface mounted aluminum housing with lockable glass door.

- Buttons: **EMERGENCY-OPEN** and **CLOSE**
- Displays: **EMERGENCY-OPEN, operation** and **fault**


Housing dimensions:

(W x H x D)	Colour	
125 x 125 x 33 mm	red	(like RAL 3001) 527550
125 x 125 x 33 mm	yellow	(like RAL 1021) 527551
125 x 125 x 33 mm	grey	(like RAL 7035) 527552
125 x 125 x 33 mm	blue	(like RAL 5012) 527553
125 x 125 x 33 mm	orange	(like RAL 2011) 527554

Protective case with protection class IP 54


527559

for breakglass unit in aluminium housing, retrofitting set with seals, colour: grey (like RAL 7035)

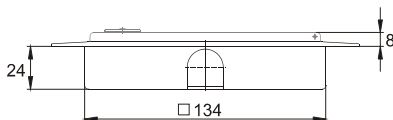

Surcharge to mount breakglass unit onto control unit lid

528022

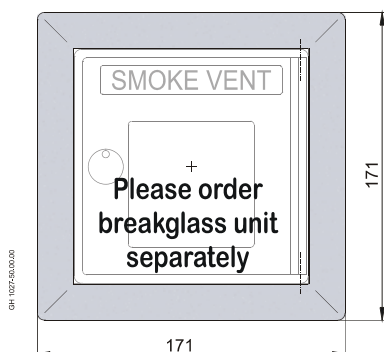

Frame for flush mounted breakglass unit

528015

customer provided opening: 140 x 140 x 30 mm; frame dimensions: 171 x 171 x 26 mm, light grey (RAL 7035), pulverized, w/o structure